

DC-Motors

Precious Metal Commutation

5 mNm

For combination with
 Gearheads: 20/1, 22E, 22/2, 22/5, 22/6, 23/1, 38/3
 Encoders: IE2 – 16 ... 512, HE2-16


Series 2224 ... SR

	2224 U	003 SR	006 SR	012 SR	018 SR	024 SR	036 SR	
1 Nominal voltage	U_N	3	6	12	18	24	36	Volt
2 Terminal resistance	R	0,56	1,94	8,71	17,50	36,30	91,40	Ω
3 Output power	$P_{2 \max}$	3,92	4,55	4,05	4,54	3,88	3,46	W
4 Efficiency	η_{\max}	80	82	82	82	81	80	%
5 No-load speed	n_o	8 100	8 200	7 800	8 100	7 800	7 800	rpm
6 No-load current (with shaft \varnothing 2,0 mm)	I_o	0,066	0,029	0,014	0,010	0,007	0,005	A
7 Stall torque	M_H	18,5	21,2	19,8	21,4	19,0	16,9	mNm
8 Friction torque	M_R	0,23	0,2	0,2	0,21	0,2	0,22	mNm
9 Speed constant	k_n	2 730	1 380	657	454	328	219	rpm/V
10 Back-EMF constant	k_E	0,366	0,725	1,520	2,200	3,040	4,560	mV/rpm
11 Torque constant	k_M	3,49	6,92	14,50	21,00	29,10	43,50	mNm/A
12 Current constant	k_i	0,286	0,144	0,069	0,048	0,034	0,023	A/mNm
13 Slope of n-M curve	$\Delta n/\Delta M$	438	387	394	379	411	462	rpm/mNm
14 Rotor inductance	L	11	45	200	450	800	1 800	μH
15 Mechanical time constant	τ_m	11	11	11	11	11	11	ms
16 Rotor inertia	J	2,4	2,7	2,7	2,8	2,6	2,3	gcm ²
17 Angular acceleration	α_{\max}	77	78	74	77	74	74	$\cdot 10^3 \text{rad/s}^2$
18 Thermal resistance	$R_{th 1} / R_{th 2}$	5 / 20						K/W
19 Thermal time constant	τ_{w1} / τ_{w2}	6,8 / 440						s
20 Operating temperature range:								
- motor		- 30 ... + 85 (optional - 55 ... + 125)						$^{\circ}C$
- rotor, max. permissible		+ 125						$^{\circ}C$
21 Shaft bearings		sintered bronze sleeves		ball bearings		ball bearings, preloaded		
22 Shaft load max.:		(standard)		(optional)		(optional)		
- with shaft diameter		2,0		2,0		2,0		mm
- radial at 3 000 rpm (3 mm from bearing)		1,5		8		8		N
- axial at 3 000 rpm		0,2		0,8		0,8		N
- axial at standstill		20		10		10		N
23 Shaft play:								
- radial	\leq	0,03		0,015		0,015		mm
- axial	\leq	0,2		0,2		0		mm
24 Housing material		steel, black coated						
25 Weight		46						g
26 Direction of rotation		clockwise, viewed from the front face						

Recommended values - mathematically independent of each other

27 Speed up to	$n_{e \max}$	8 000	8 000	8 000	8 000	8 000	8 000	rpm
28 Torque up to	$M_{e \max}$	5	5	5	5	5	5	mNm
29 Current up to (thermal limits)	$I_{e \max}$	2,200	1,200	0,570	0,400	0,280	0,180	A

Orientation with respect to motor terminals not defined

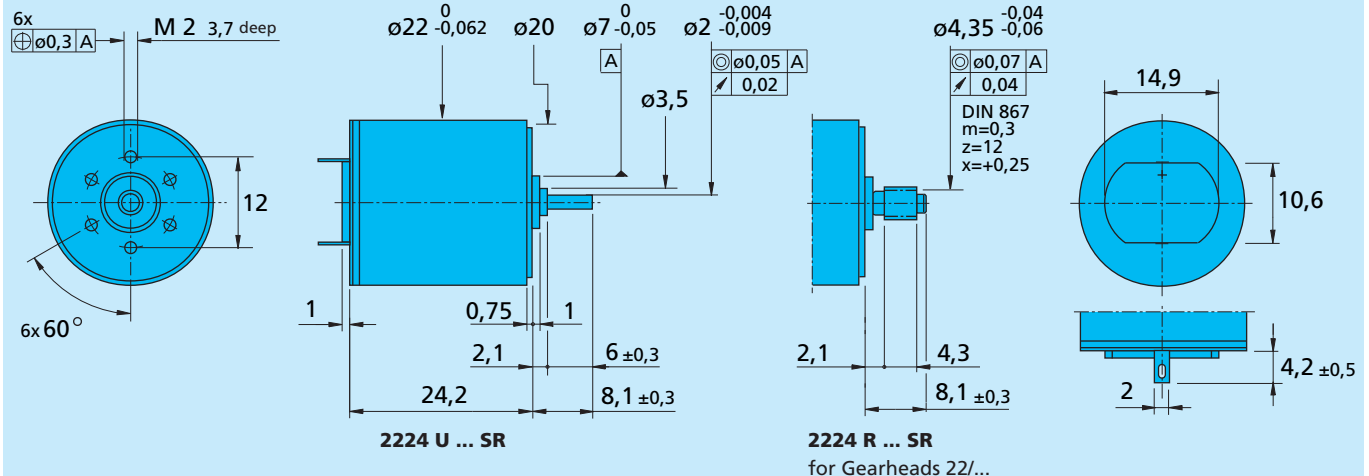

How to Order a 2224 ... SR

Part number	Voltage	Description	Stocked items
2224A012SR	12	Standard motor with "A" pinion for 22E gearhead	yes
2224A012SRIE2-512	12	Standard motor with "A" pinion & IE2-512 encoder	yes
2224A024SR	24	Standard motor with "A" pinion for 22E gearhead	yes
2224A024SRIE2-512	24	Standard motor with "A" pinion & IE2-512 encoder	yes
2224B012SR	12	Standard motor with "B" pinion for 22E gearhead	yes
2224B012SRIE2-512	12	Standard motor with "B" pinion & IE2-512 encoder	yes
2224B024SR	24	Standard motor with "B" pinion for 22E gearhead	yes
2224B024IE2-512	24	Standard motor with "B" pinion & IE2-512 encoder	yes
2224U003SR	3	Standard motor	no
2224U006SR	6	Standard motor	no
2224U012SR	12	Standard motor	yes
2224U018SR	18	Standard motor	no
2224U024SR	24	Standard motor	no
2224U024SRIE2-512	24	Standard motor with IE2-512 encoder	yes
2224U036SR	36	Standard motor	no
2224R003SR	3	Standard motor	no
2224R006SR	6	Standard motor	yes
2224R012SR	12	Standard motor	yes
2224R012SRIE2-512	12	Standard motor with IE2-512 encoder	yes
2224R018SR	18	Standard motor	no
2224R024SR	24	Standard motor	no
2224R036SR	36	Standard motor	no